

# ***SUPER-SPRAYFAST***™

## ***UNIVERSAL***

### **ADHESIVE APPLICATING SYSTEM FOR WATER-BASED ADHESIVES**

**ITEM # 5151**

The revamped Universal version of our Super Sprayfast Adhesive Applicator (SSFU) machine makes it possible to use the same applicator on either a 5 gallon bucket or 55 gallon drum. In addition, it now also includes a new flush kit for easy clean up and maintenance (more information on back). The SSFU features an acetal/teflon diaphragm pump **circulating system** and **surge tank** to provide quick, easy and even spray, with minimal overspray.

#### ***ITEM# 5151***

(Adhesive not included.)



#### ***Reliable***

The acetal and teflon air operated diaphragm pump coupled with the circulating system keeps the adhesive fresh. The built in surge tank helps maintain an even spray. The spray gun is constructed of aluminum and stainless steel to resist corrosion.

#### ***Safe***

The SSFU has been designed for use with Duro Dyne's WIT, WSA and SSG water-based adhesives. These adhesives are nonflammable and contain zero solvents. No venting is required.

#### ***Ease of Operation***

Place the pump (factory mounted to the cover) on top of the adhesive container. Attach the air-line to the Super Sprayfast Universal pump. The pump is self-priming and charges the spray gun quickly. A 15-foot hose gives the operator plenty of freedom of movement.

#### ***Versatile***


The Super Sprayfast Universal is designed for use with 5 gallon pails or 55 gallon drums of water-based adhesive.

#### ***Flush Kit Assembly***

For optimum performance, it is recommended that you flush out your Super Sprayfast Universal Machine (SSFU) weekly. The new flush kit of the SSFU model makes this clean up and maintenance procedure easier than ever before. Simply close the glue valve, open the water valve and set your water hose into a 5 gallon pail of water. Then, spray out any remaining glue in your hose. The pump will flush out the hoses for the next use.

**MACHINERY DIVISION**  
© 2015 Duro Dyne Corporation  
Printed in USA 12/2015  
BC039406

**DURO**  
**DYNE**®

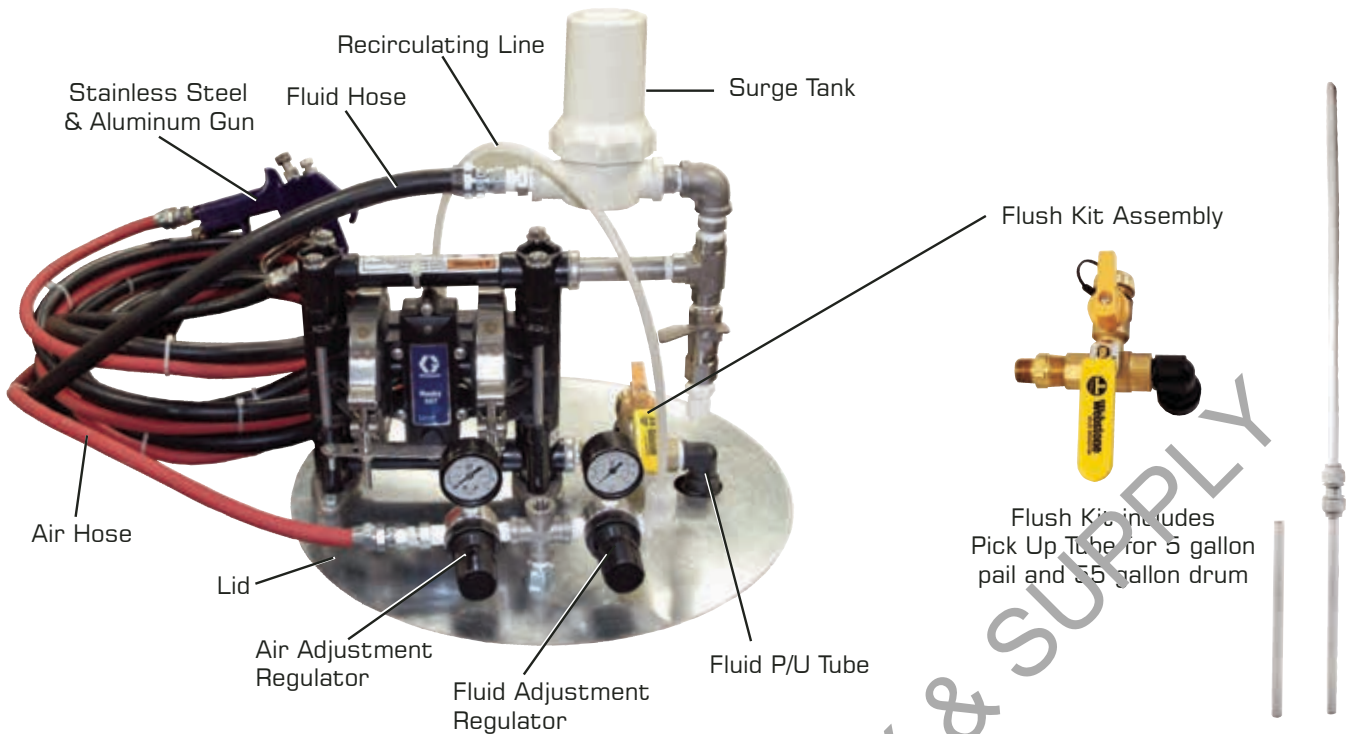

### Specifications

Air Requirements  
 Pump: 80 PSI 2 CFM  
 Atomization: 15-100 PSI  
 15-24 CFM

### Ordering Info

Item#	Description
5151	Super Sprayfast Universal for use with 5 gallon pail and 55 gallon drum of water-based adhesive

**The Super Sprayfast Universal is specifically designed for use with Duro Dyne Water-Based Adhesives:**

**WIT, WITLV-AS, SSG, WSA**



Duro Dyne East Division, Bay Shore, NY  
 Duro Dyne Midwest Division, Fairfield, OH  
 Duro Dyne West Division, Fontana, CA  
 Duro Dyne Canada, Lachine, Quebec, Canada  
 www.durodyne.com E-mail: durodyne@durodyne.com

631-249-9000 Fax: 631-249-8346  
 513-870-6000 Fax: 513-870-6005  
 562-926-1774 Fax: 562-926-5778  
 514-422-9760 Fax: 514-636-0328