

## BUTTON PUNCH SNAP-LOCK

The Button Punch Snap Lock Machine forms a two piece seam that greatly simplifies ductwork assembly. The male seam is a button, the female seam is a lock and the two snap together for a flush corner. These machines can form 20 to 26 gauge sheet metal into female locks on the inboard and button punched right angle flanges on outboard rolls at speeds of 60-65 fpm and are available in seven and nine forming station machines. Not only do these locks assemble twice as fast as traditional methods but, because the two pieces nest, they are easier to transport too.

Standard with Lockformer® quality construction, these machines have industrial motors; high precision needle-type bearings; heavy ¾" chassis plate; case-hardened and ground roll shafts; and arc-welded steel stands protected with Lockformer®'s top-quality primer and paint finish. Alternate fittings are easily accessible from a main transmission bearing lubrication panel.

Button Punch Snap Lock Profile



Model Details



Outboard roll profile



Inboard roll profile

## TRIPLEX CLEATFORMER

“S” cleats and more – A flexible Lockformer®, designed for super high productivity of inboard cleats. The triplex design has two inboard and two outboard forming positions allowing bearing support on both sides of the profile. The top plate and roll assembly are split into three zones with each having special design details like knurled rolls and angled guides to keep material moving through the machine in a straight line. These zones also can be adjusted by the operator to meet the requirements of a wide variety of gauges.

With 9 forming stations, the Triplex Cleatformer can form multiple gauge sheet metal into “S” and drive cleats on the inboard forming positions and up to 12 auxiliary roll set profiles on the outboard forming positions at speeds averaging 100 fpm.

Standard with Lockformer® quality construction, this machine has a 5 H.P. industrial motor; high precision needle-type bearings; heavy ¾" chassis plate; case-hardened and ground roll shafts; and an arc-welded steel stand protected with Lockformer®'s top-quality primer and paint finish.


Model Details




"S" Cleat inboard profile



Drive cleat roll profile

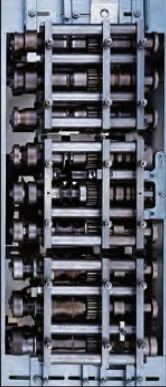

Form roll configuration



"S" and drive cleat scrap cutter attachment




Plate housing

Triplex Cleatformer Profile

Drive cleat rolls inboard 20-26 gauge:



"S" cleat inboard 22-26 gauge

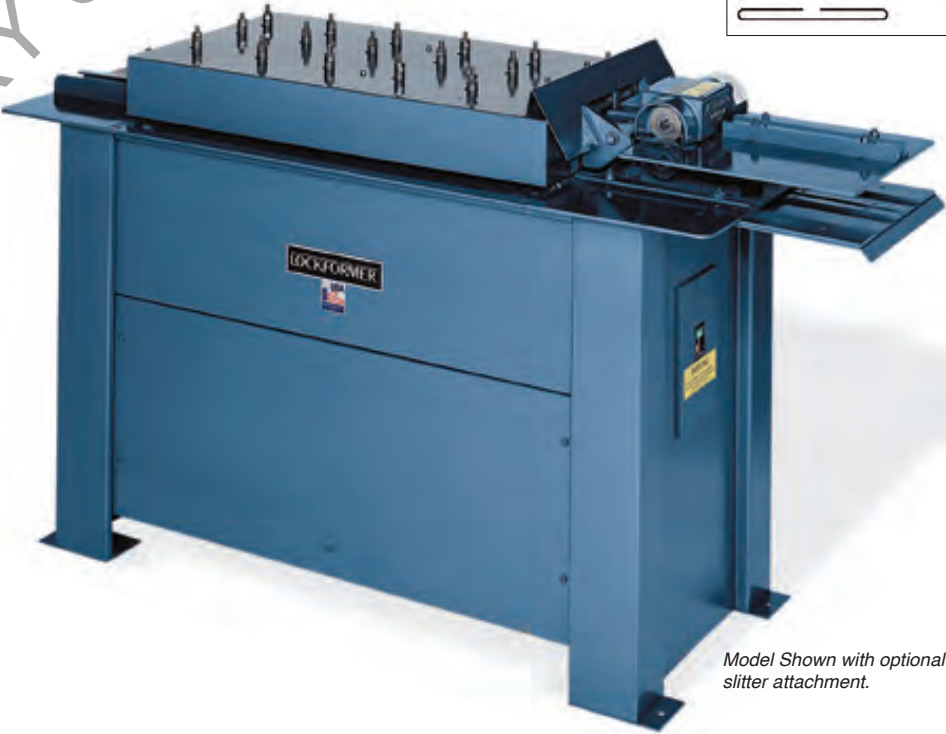

Model Shown with optional  
slitter attachment.

MODEL	CAPACITY	DEPTH OF POCKET/SIZE	OTHER	SPEED	MOTOR/VOLTAGE	DIMENSIONS/WEIGHT
20 GAUGE BUTTON PUNCH SNAPLOCK	20–26 gauge	Uses approximately 1-3/4" material		60 - 65 feet per minute	3 H.P. 230/460 volts, 60 cycle, 3phase, A.C. 3,600 RPM. Other motors available upon request.	Length - 58.5" Width - 24" Height - 41" Passline - 34" Weight - 125 lbs.
TRIPLEX CLEATFORMER	22-28 gauge for "S" cleat profile and 20-26 gauge for drive cleat profile	"S" cleat width 1-1/16" Drive cleat width 1-1/8"	Extended shafts for mounting auxiliary rolls.	100 feet per minute	5 H.P. 230/460 volts, 60 cycle, 3phase, A.C. 1,800 RPM.	Length - 60" Width - 24" Height - 40" Passline - 32-1/2" Weight - 850 lbs.